


LIFEGUARD SAFETY SYSTEM

LifeGuard™ Tri-Bolt Breakaway Rubber SS NH3 Hoses

The LifeGuard™ Tri-Bolt Breakaway Hose is designed to increase the safety of your hose and facility by incorporating protection against the unintended pull-away of tank trucks, railcars, barges and ships. Utilizing a **Engineered Compression Spring** system with two non-return valves installed within each fitting, we have now included a **Tri-Bolt Flange System** with three shear bolts on one fitting that

separates under a controlled condition and prevents product loss in the event of an emergency separation. The LifeGuard™ Tri-Bolt Breakaway Hose is designed to separate at any angle when subjected to a designated pull force. In case of separation, its patent pending design assures that not less than two bolts will separate causing the internal valves to engage and the piping to remain intact with flow stopped on both ends of the hose.

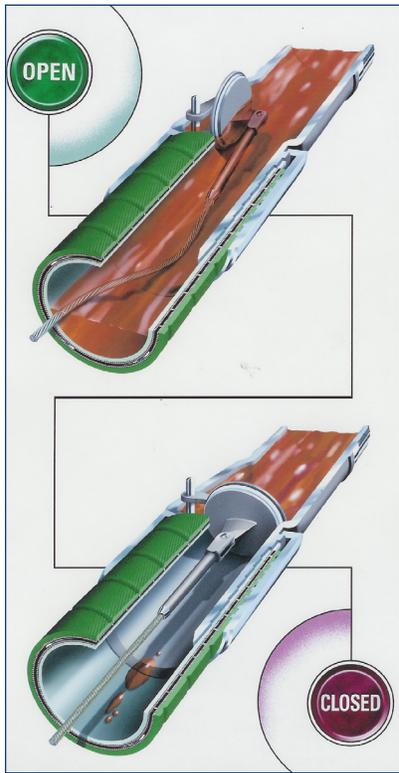

Cover: Black EPDM with Green stripe – abrasion & weather resistant

Tube: Black Neoprene

Reinforcement: One or multiple stainless steel braids, 1 textile braid
Cover: Perforated Black NBR/PVC w/silver stripe

Temperature: -40° F to +180° F

Packaging: Branding: Side 1: XXXX 7261 SS ANHYDROUS AMMONIA - REMOVE NO LATER THAN 350 PSI MAX WP RMA(BATCH CODE)- CAUTION ANHYDROUS AMMONIA USE ONLY XXXX REMOVE NO LATER THAN XXXX.

Side 2: Solid silver stripe.

Maintenance: See LifeGuard Safety-Hose Proper Use, Care, and Maintenance Booklet – 20XX

All Hoses comply with DOT 49 CFR 173.315 Passive Device Regulations

ID	WP	Hose Wt/Ft	Coupling		Part #
	psi		Weight - plunger	Weight - flapper	
1"	350	.8 lb	1.6 lb		NH306006160000-SS
1 1/4"	350	1 lb	2.5 lb		NH306008160000-SS
1 1/2"	350	1.2 lb	2.9 lb		NH306010140000-SS
2"	350	1.4 lb		3.4 lb	NH306012320000-SS
2"	350	1.77 lb		4.7 lb	NH306016330000-SS